
PLEATED BLINDS
PL20SV6

SV6 pleated blind, tensioned, with handle Fixed tension cords - the system can also be mounted upside down (the curtain closes from top to bottom)

1. Fixed top rail (min. 11.6 cm)
2. Operating rail with handle (EOS standard metal handle or FUSION metal handle, FLEX plastic handle on request)
3. Operating rail with handle (EOS standard metal handle or FUSION metal handle, FLEX plastic handle on request)
4. Lower rail (fixed)

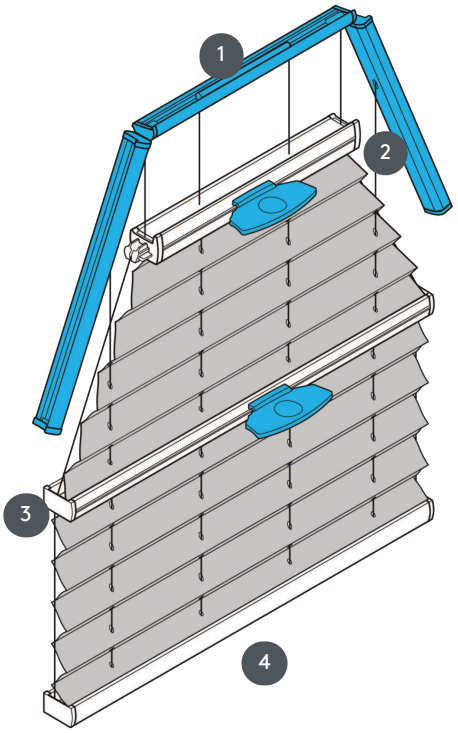

Mounting type	min./max. dimensions	Operation	Fabric colour
screwed	min. baseline 50 cm/max. baseline 150 cm **Maximum height dimensions:** min. height 30 cm/max. height 250 cm	using handles on the operating rails	according to the latest collection

You can find further information at leha.at
Project-related special designs available on request.
All values are manufacturer's specifications, production-related fluctuations are possible.
Stand 21.10.2026