
ROLLO
BLISS M25T

The Bliss M25T battery motor was specially developed for roller blind and twin blind or refinement applications. Drive with integrated lithium-ion battery. Integrated Bluetooth receiver for wireless control with app and integrated radio receiver for wireless control with handheld transmitter.

TECHNICAL DATA



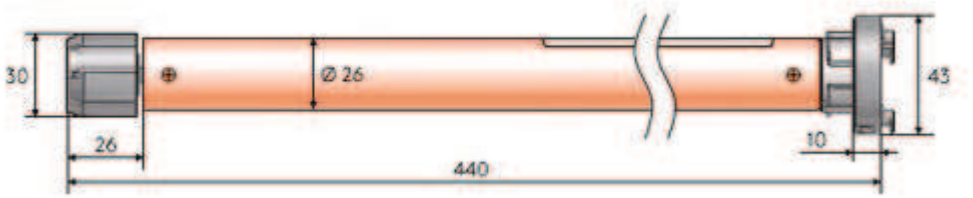

Manufacturer	Hunter Douglas
Power supply	7.4 V DC
Power consumption	800 mA
Torque	1.1 Nm
Revolutions / min	28
Operating temperature	-10 ° up to +60 ° C


Protection class	IP 20
Protection class	III
Weight	465 g
Radio system	Hunter Douglas Bliss
Radio frequency	Bluetooth 2,402-2,480 GHz; ASK 433,92 MHz
Article number	17.0901

FUNK

OPERATING PRINCIPLE



WIRING DIAGRAM

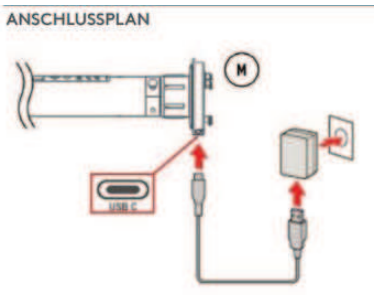

SUITABLE FOR SERIES

ELRO-S, ELKARO-S, ELKARO-M, ELDERO-S

(!) Battery motor - cable connection only required to charge the battery