
PLEATED BLINDS
PL20PLE2

Pleated blind type PLE for ceiling installation (tensioned) with motor. The system is installed horizontally or on a slope (inclination from 45° vertical to 90° horizontal). TYPE PLE2 = blind stack at top, motor at top

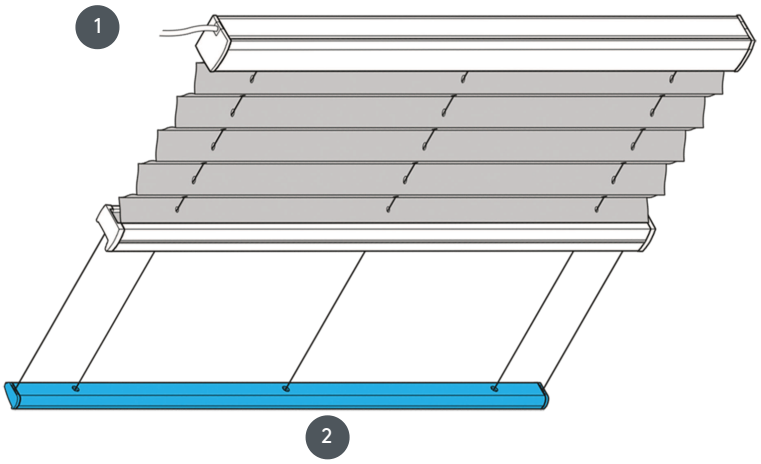

1 24 V electric motor

2 Fixed bottom rail

Mounting type	min./max. dimensions	Operation	Fabric colour
either bolted or with mounting profile	min. width 40 cm/max. width 230 cm min. height 10 cm/max. height 400 cm	by means of 24 V electric drive **EC - Declaration of Conformity in accordance with ÖNORM EN 13120:2014**	according to the latest collection

You can find further information at leha.at
Project-related special designs available on request.
All values are manufacturer's specifications, production-related fluctuations are possible.
Stand 22.10.2026