
DUETS
DU25SVDR1

Duets with handle control for triangle system. The system can also be mounted upside down.

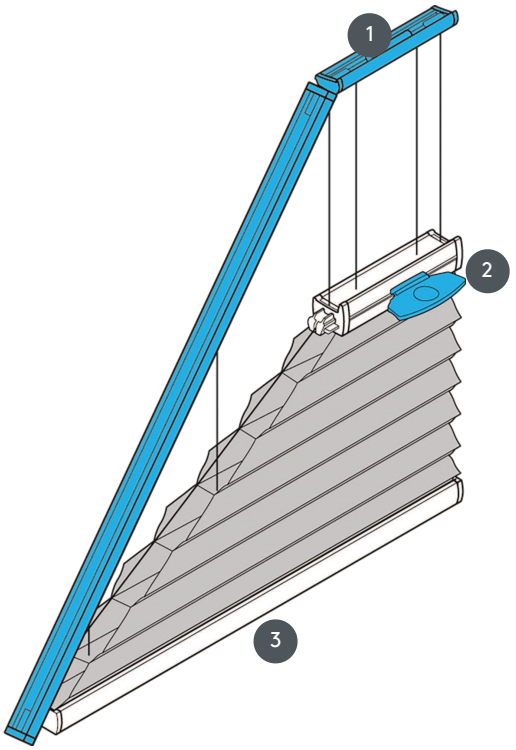

1. Fixed headrail (min. 11.6 cm)
2. Central rail operable - EOS standard metal handle or FUSION metal handle, FLEX plastic handle on request
3. Lower rail (fixed)

Mounting type	min./max. dimensions	Operation	Fabric colour
screwed	min. base line 15 cm / max. base line 120 cm min. height 10 cm / max. height 220 cm max. area 2 m²	using handles on the movable rails	according to the latest collection

You can find further information at leha.at
Project-related special designs available on request.
All values are manufacturer's specifications, production-related fluctuations are possible.
Stand 08.07.2026