
ROLLO
POWERVIEW 230V

The PowerView M40PV3G 330 motor is a 230 V tubular motor that was specially developed for roller blind applications. Drive with the latest transmission technology for smooth running characteristics. Integrated Bluetooth radio receiver for wireless control in PowerView networks.

TECHNICAL DATA



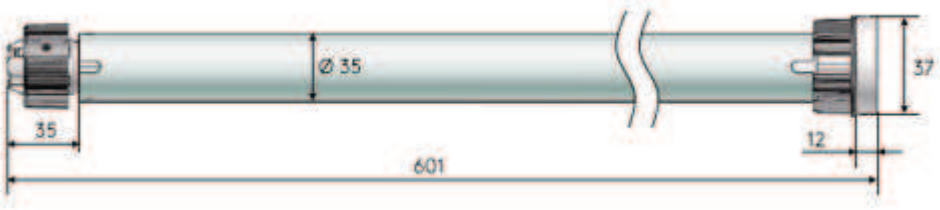

Manufacturer	Hunter Douglas
Power supply	230 V AC
Power	90 W
Power consumption	400 mA
Torque	3 Nm
Revolutions / min	30
Max. revolutions	370
Max. Duty cycle	4 min
Volume	40 dB
Operating temperature	-10 ° up to +60 ° C


Protection class	IP 30
Mains cable	2,5 m; 3-polig weiß; offene Enden; Querschnitt 3 x 0,75 mm²
Weight	1540 g
Radio system	Hunter Douglas Powerview
Radio frequency	Bluetooth 2,402-2,480 GHz
Article number	45.8139

FUNK

OPERATING PRINCIPLE




WIRING DIAGRAM



SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELKARO-L, ELDERO-M

MOTOR CABLE COLOURS



Blau = Nullleiter (N)
Braun = Leiter (L1)
Gelb-Grün = Schutzleiter (PE)

Installations in the 230V range may only be carried out by authorized specialists.